

C101-05

Lifting Bracket with Rope Safety Stop

Ordering-Example:


Diferent Lengths On Request.

Material: C45E 700 ÷ 800 N/mm²



WARNING!

For safety reasons, the weight of the tool has to be supported by just two lifting brackets.
Respect the max. load.

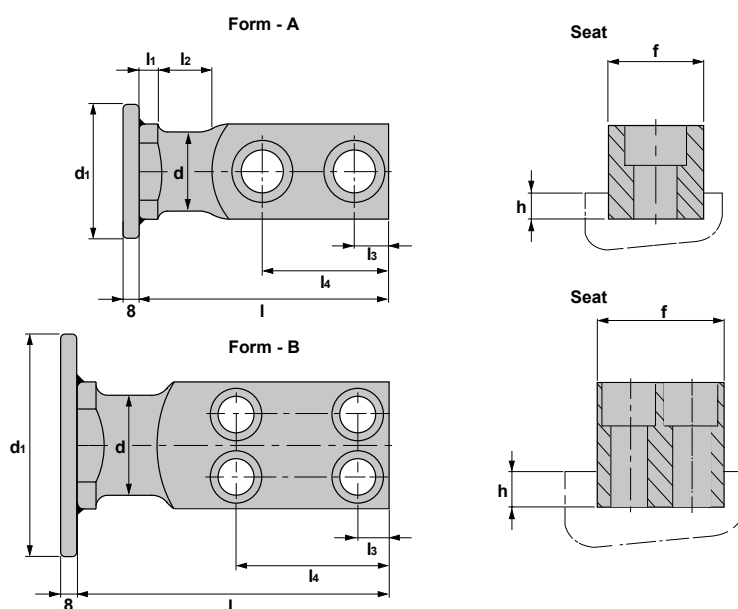

CODE	Max. Load (kg)	Max.Die Weight (kg)	Form	d	d1	l	l1	l2	l3	l4	f +1 / +0,5	h	DIN EN ISO 4762 - Screw 8.8
C101-05-020-080	320	640	A	16	60	80	6	20	10	44	20	6	M8x30
C101-05-025-090	630	1260	A	20	70	90	8	25	10	47	25	8	M10x35
C101-05-035-100	1250	2500	A	25	70	100	8	30	12	50	35	10	M12x40
C101-05-040-120	2000	4000	A	32	110	120	10	32	16	62	40	10	M16x55
C101-05-050-140	3200	6400	A	40	110	140	10	40	18	72	50	12	M20x70
C101-05-060-160	5000	10000	A	50	150	160	12	45	22	81	60	14	M24x70
C101-05-080-200	8000	16000	B	63	150	200	12	50	20	98	80	16	M20x100
C101-05-100-250	12500	25000	B	80	150	250	15	65	25	125	100	18	M24x110
C101-05-120-300	20000	40000	B	100	150	300	15	80	30	155	120	20	M30x130