

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

ACTIVE SAFETY



OSAS



USAS



OPAS



SKUDO

* $F_{1i} =$


Isothermal end force at 100% Cu



p. 16

** $F_{1p} =$

Polytrophic end force at 100% Cu




N ₂		0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 180 bar 2610 psi	P min 20 bar 290 psi	S 1,77 cm ² 0.27 in ²	SPM ~ 40 - 100 (at 20°C)	Max Speed 1,8 m/s 70.8 in/s	Maintenance kit Disposable		
CODE	NEW	Cu	L	L min	F ₀	F _{1i} *	F _{1p} **	V ₀		PED	
PHASING OUT from 01/2020		mm inch	mm inch	mm inch	Initial force daN lb	End force * daN lb	End force ** daN lb	cm ³ in ³	~Kg ~lb	2014/68/EU	
RS 320 - 007 - B	RS 320 - 007 - C	7 0.28	50 1.97	43 1.69	320 719 ± 5%	438 985	494 1110	5,5 0.34	0,10 0.23	✓	
RS 320 - 010 - B	RS 320 - 010 - C	10 0.39	56 2.20	46 1.81		463 1041	529 1188	6,9 0.42	0,11 0.24	✓	
RS 320 - 012 - B	RS 320 - 012 - C	12 0.47	60 2.36	48 1.89		475 1069	547 1229	7,8 0.47	0,11 0.25	✓	
RS 320 - 016 - B	RS 320 - 016 - C	16 0.63	68 2.68	52 2.05		495 1112	574 1291	9,6 0.58	0,12 0.26	✓	
RS 320 - 022 - B	RS 320 - 022 - C	22 0.87	80 3.15	58 2.28		514 1155	603 1355	12,3 0.75	0,13 0.29	✓	
RS 320 - 029 - B	RS 320 - 029 - C	29 1.14	94 3.70	65 2.56		529 1189	625 1404	15,5 0.94	0,14 0.31	✓	
RS 320 - 035 - B	RS 320 - 035 - C	35 1.38	106 4.17	71 2.80		180 bar 2610psi	538 1209	638 1434	18,2 1.11	0,15 0.33	✓
RS 320 - 047 - B	RS 320 - 047 - C	47 1.85	130 5.12	83 3.27		+ 20 °C +68 °F	550 1237	656 1475	23,6 1.44	0,17 0.38	✓
RS 320 - 060 - B	RS 320 - 060 - C	60 2.36	156 6.14	96 3.78			559 1256	669 1503	29,5 1.80	0,19 0.43	✓
RS 320 - 072 - B	RS 320 - 072 - C	72 2.83	185 7.28	113 4.45			557 1252	667 1498	35,5 2.17	0,22 0.48	✓
RS 320 - 077 - B	RS 320 - 077 - C	77 3.03	195 7.68	118 4.65	559 1257		670 1506	37,7 2.30	0,23 0.50	✓	
RS 320 - 097 - B	RS 320 - 097 - C	97 3.82	235 9.25	138 5.43	566 1272		680 1528	46,8 2.85	0,26 0.57	✓	
RS 320 - 122 - B	RS 320 - 122 - C	122 4.80	285 11.22	163 6.42	571 1284	688 1546	58,1 3.54	0,30 0.66	✓		

WARNING REMOVE SKUDO

Upside down mounting

FC / FCC fixings

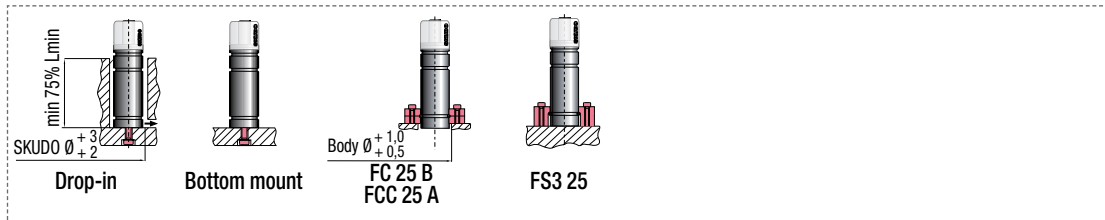

HOW TO ORDER

INSTALLATION GUIDELINE