




ISO 11901 - 1	VDI 3003	B2 4006 (BMW)	075.90.55 (FCA)
W-DX35-6203 (Ford)	PG23D (Mazda)	B8 3180 220 000 001(MB)	K 32 S (Nissan)
E24.54.815.G (PSA)	EM24.54.700 (Renault)	SES-K 5404e (Suzuki)	39D 878 (VW)

SC 750

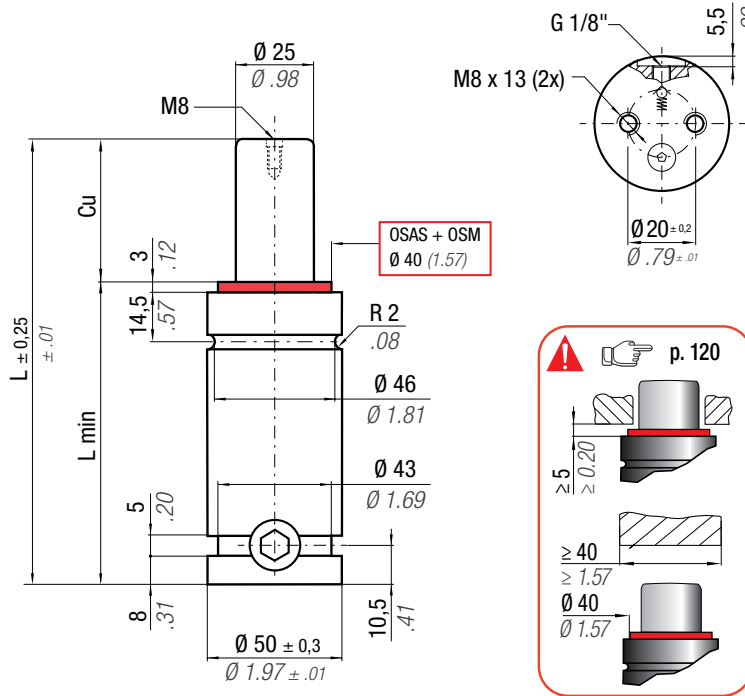

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER



Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

ACTIVE SAFETY



OSAS



USAS



OPAS

easu MANIFOLD p. 247


* F_{1i} = Isothermal end force at 100% Cu p. 16

** F_{1p} = Polytrophic end force at 100% Cu

	0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 4,91 cm ² 0,761 in ²	SPM ~ 15 - 50 (at 20°C)	Max Speed 1,8 m/s 70,8 in/s	Maintenance kit 39BMS00750D
--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	-----------------------------------------------------------	--------------------------------------	------------------------------------------	---------------------------------------

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F _{1i} * End force *		F _{1p} ** End force **		V0		PED 2014/68/EU		
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³		~Kg	~lb
SC 750 - 013 - D	SC 750 - 013 - E	12,7	0.50	120,4	4.74	107,7	4.24	740 1664 ± 5%	150 bar 2175 psi	922	2073	1039	2335	36	2.21	1,24	2.73	✓
SC 750 - 025 - D	SC 750 - 025 - E	25	0.98	145	5.71	120	4.72			1002	2252	1160	2607	54	3.28	1,34	2.95	✓
SC 750 - 038 - D	SC 750 - 038 - E	38	1.50	171	6.73	133	5.24			1049	2359	1233	2772	73	4.42	1,45	3.20	✓
SC 750 - 050 - D	SC 750 - 050 - E	50	1.97	195	7.68	145	5.71			1077	2422	1277	2871	90	5.47	1,54	3.40	✓
SC 750 - 063 - D	SC 750 - 063 - E	63,5	2.50	222	8.74	158,5	6.24			1099	2471	1312	2949	109	6.65	1,65	3.64	✓
SC 750 - 075 - D	SC 750 - 075 - E	75	2.95	245	9.65	170	6.69			1113	2502	1334	2998	126	7.66	1,75	3.86	✓
SC 750 - 080 - D	SC 750 - 080 - E	80	3.15	255	10.04	175	6.89			1118	2513	1342	3016	133	8.10	1,79	3.95	✓
SC 750 - 088 - D	SC 750 - 088 - E	87,5	3.44	270	10.63	182,5	7.19			1128	2535	1357	3052	144	8.76	1,85	4.08	✓
SC 750 - 100 - D	SC 750 - 100 - E	100	3.94	295	11.61	195	7.68			1134	2549	1367	3073	161	9.85	1,96	4.32	✓
SC 750 - 113 - D	SC 750 - 113 - E	113	4.45	320	12.60	207	8.15			1144	2571	1383	3109	179	10.94	2,06	4.54	✓
SC 750 - 125 - D	SC 750 - 125 - E	125	4.92	345	13.58	220	8.66	1147	2579	1389	3122	197	12.03	2,16	4.76	✓		
SC 750 - 138 - D	SC 750 - 138 - E	138	5.43	370	14.57	232	9.13	1158	2604	1407	3162	214	13.05	2,27	5.00	✓		
SC 750 - 150 - D	SC 750 - 150 - E	150	5.91	395	15.55	245	9.65	1168	2626	1423	3198	229	13.97	2,39	5.27	✓		
SC 750 - 160 - D	SC 750 - 160 - E	160	6.30	415	16.34	255	10.04	1177	2646	1437	3230	241	14.71	2,49	5.49	✓		
SC 750 - 175 - D	SC 750 - 175 - E	175	6.89	445	17.52	270	10.63	1189	2673	1456	3273	259	15.82	2,64	5.82	✓		
SC 750 - 200 - D	SC 750 - 200 - E	200	7.87	495	19.49	295	11.61	1206	2711	1483	3335	289	17.65	2,89	6.37	✓		
SC 750 - 225 - D	SC 750 - 225 - E	225	8.86	545	21.46	320	12.60	1220	2742	1506	3386	320	19.50	3,13	6.90	✓		
SC 750 - 250 - D	SC 750 - 250 - E	250	9.84	595	23.43	345	13.58	1232	2769	1526	3430	350	21.34	3,32	7.32	✓		
SC 750 - 275 - D	SC 750 - 275 - E	275	10.83	645	25.39	370	14.57	1242	2791	1542	3467	380	23.18	3,63	8.00	✓		
SC 750 - 300 - D	SC 750 - 300 - E	300	11.81	695	27.36	395	15.55	1250	2811	1557	3500	410	25.02	3,88	8.55	✓		

◆ Disposable

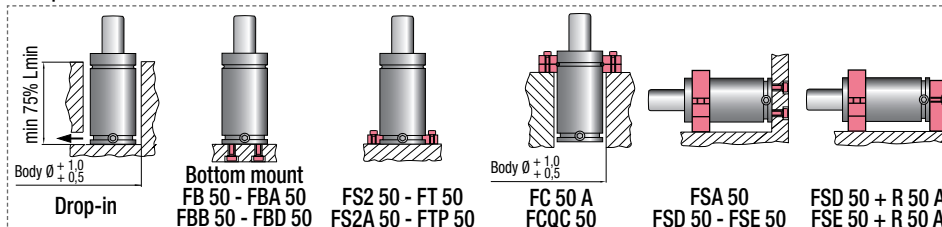

HOW TO ORDER



INSTALLATION GUIDELINE

