
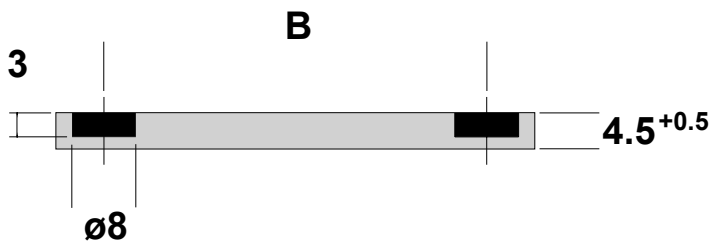


Special Sizes Available On Request.

● Cad Insertion Point

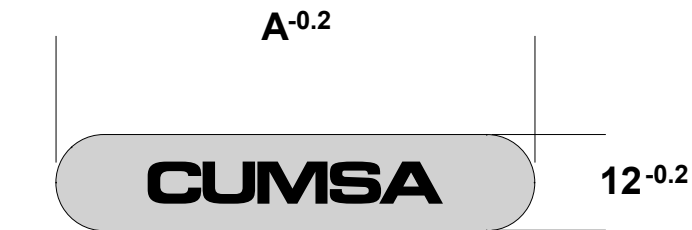

Ref.	A	B	Material	Max. Temp.
SC.401245	40	28	Nylon	80°C
SC.401245H	40	28	PA+30% Glass Fiber	150°C
SC.601245	60	48	Nylon	80°C
SC.601245H	60	48	PA+30% Glass Fiber	150°C

IMPORTANT! Supplied in bags of 10 units.

Installation Guidelines

