


A - DW BLOCK CYLINDER

Special Sizes Available On Request.

3D Insertion Reference

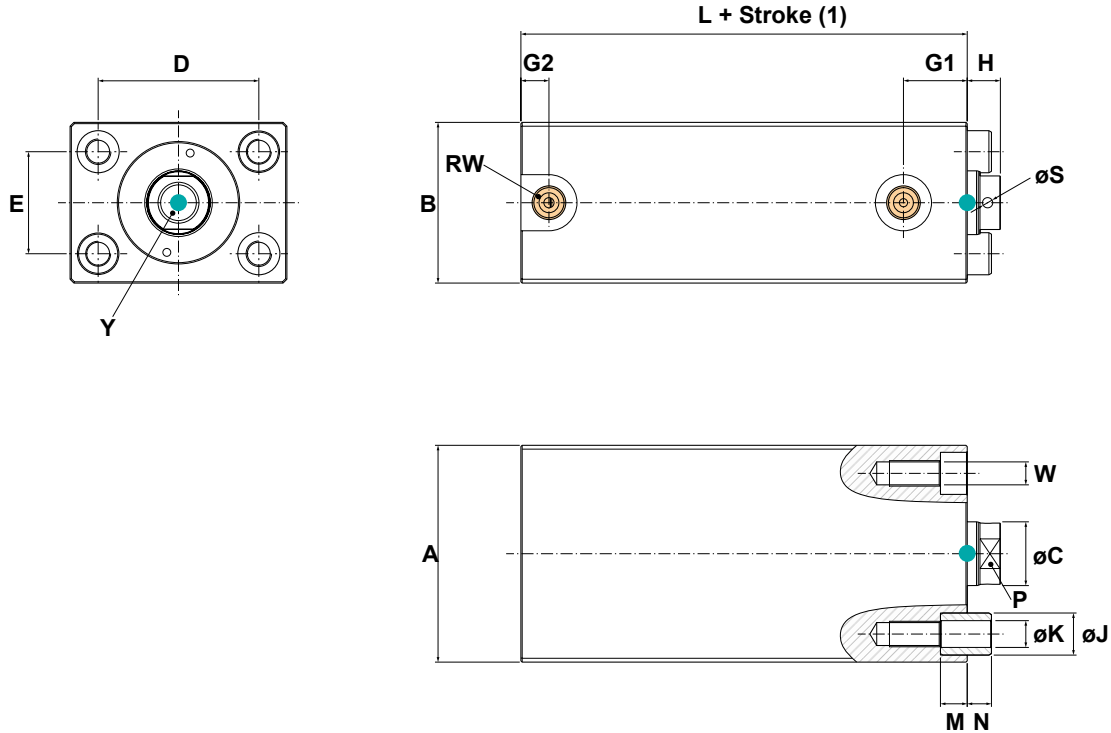

HOW TO ORDER

Reference: **A0DW025-090P2S1**

TYPE	OPERATION MODE	FIXING STYLE	PISTON ø	STROKE ±0.5 (1)		PURGE (2)	SENSOR (2)	A	B	C	D
				MIN.	MAX.						
A	0	DW	016	010	100	P0 Px	S0 Sx	60	35	10	40
			025	010	120			65	45	16	50
			032	010	150			75	55	20	55
			040	020	160			85	63	25	63
			050	020	180			100	75	32	76
			063	020	180			125	95	40	95
			080	020	180			160	120	50	120
			100	020	180			200	150	60	158

STROKE (1) Can be ordered in multiples of 10mm, between Min. and Max. values.


PURGE / SENSOR(2) Replace x by FACE number.

A - DW FIXING STYLE

Special Sizes Available On Request.

3D Insertion Reference

PURGE / SENSOR (2) POSITION ORDERING

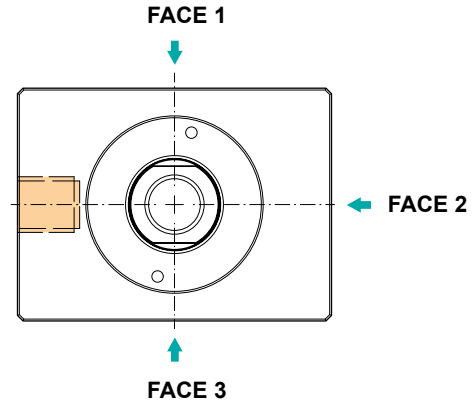

P0: Without Purge
Px: Purge in FACE x
Replace x by FACE number

SENSOR AND SENSOR ASSEMBLY KIT MUST BE ORDERED SEPARATELY

S0: Without Sensor
Sx: Sensor in FACE x
Replace x by FACE number

E	G1	G2	H ±0.5	J	K	L	M	N	P	RW	S	W	Y
22	18	15	8	10.5	6.5	43	6.5	5.5	8	1/4"	-	M6x12	M6x12
30	20	13	10	13.5	8.5	48	8.5	7.5	13	1/4"	3	M8x16	M10x15
35	23	11	12	16.5	10.5	51	10.5	9.5	17	1/4"	4	M10x20	M12x15
40	25	11	13	16.5	10.5	55	10.5	9.5	21	1/4"	4	M10x20	M16x25
45	27	13	14	18.5	13	65	13	11	26	1/4"	4	M12x25	M20x30
65	28	16	18	25	17	72	17	15	32	1/2"	5	M16x32	M24x35
80	37	17	22	31	21	84	21	19	41	1/2"	5	M20x40	M30x50
108	40	20	22	37	25	90	25	23	52	1/2"	5	M24x50	M36x60