


B - CW

COOLED BLOCK CYLINDER

Special Sizes Available On Request.

3D Insertion Reference

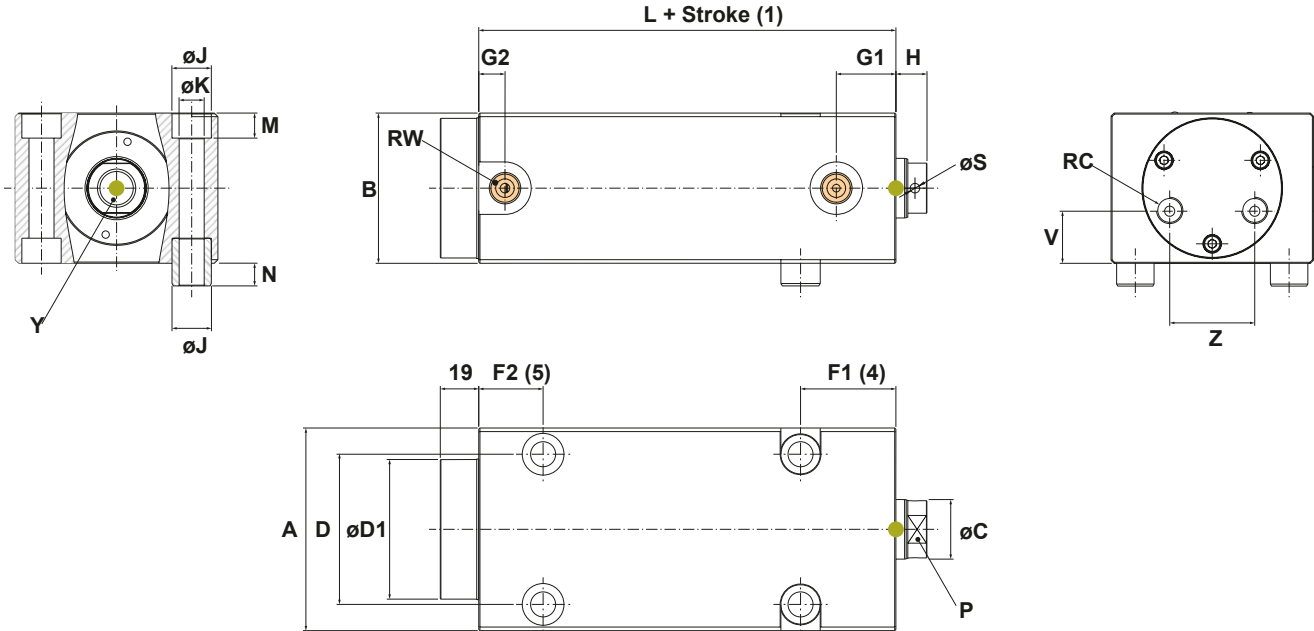

HOW TO ORDER

Reference: **B0CW025-090P2S1L**

TYPE	OPERATION MODE	FIXING STYLE	PISTON \varnothing	STROKE ± 0.5 (1)		PURGE (2)	SENSOR (2)	OIL CONNECTION (3)	A	B	C (3)	D	D1	
				MIN.	MAX.									
B	0	CW	016	010	100	P0	S0	L	60	35	10	40	34	
			025	010	120				65	45	16	50	44	
			032	010	150				75	55	20	55	52	
			040	020	160	Px	Sx		R	85	63	25	63	61
			050	020	180					100	75	32	76	69
			063	020	180					125	95	40	95	89

STROKE (1) Can be ordered in multiples of 10mm, between Min. and Max. values.

PURGE / SENSOR(2) Replace x by FACE number.

OIL CONNECTION (3) Select Left (L) or Right (R).


B - CW

FIXING STYLE

Special Sizes Available On Request.

3D Insertion Reference

PURGE / SENSOR (2) POSITION ORDERING

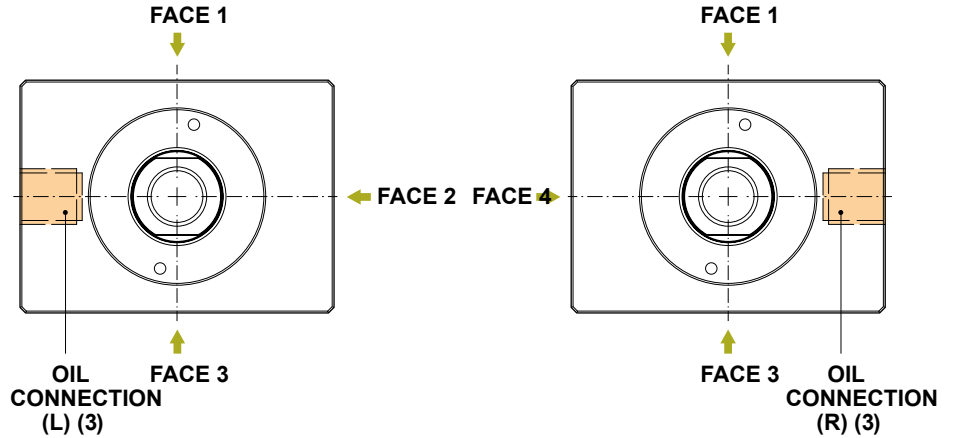

P0: Without Purge
Px: Purge in FACE x
Replace x by FACE number

SENSOR AND SENSOR ASSEMBLY KIT MUST BE ORDERED SEPARATELY

S0: Without Sensor
Sx: Sensor in FACE x
Replace x by FACE number

F1 (4)	F2 (5)	G1	G2	H ±0.5	J	K	L	M	N	P	RC	RW	S	V	Y	Z
30 (3)	27.5	18	15	8	10.5	6.5	43	6.5	5.5	8	1/8"	1/4"	-	12.4	M6x12	17.5
33	30	20	13	10	13.5	8.5	48	8.5	7.5	13	1/8"	1/4"	3	12.5	M10x15	22.5
38 (3)	28	23	11	12	16.5	10.5	51	10.5	9.5	17	1/8"	1/4"	4	17.3	M12x15	26.3
40	28	25	11	13	16.5	10.5	55	10.5	9.5	21	1/4"	1/4"	4	23.5	M16x25	31.2
44	30	27	13	14	18.5	13	65	13	11	26	1/4"	1/4"	5	26.5	M20x30	42
50	41	28	16	18	25	17	72	17	15	32	1/4"	1/2"	5	31.5	M24x35	50.5

(4) PISTON Ø16 & Stroke=10 F1 = 28
PISTON Ø32 & Stroke=10 F1 = 36

(5) PISTON Ø16 & Stroke ≤ 70 F2 = -
PISTON Ø25, Ø32, Ø40, Ø50, Ø63, Ø80, Ø100 & Stroke ≤ 90 F2 = -