


B - FW

COOLED BLOCK CYLINDER

Special Sizes Available On Request.

3D Insertion Reference

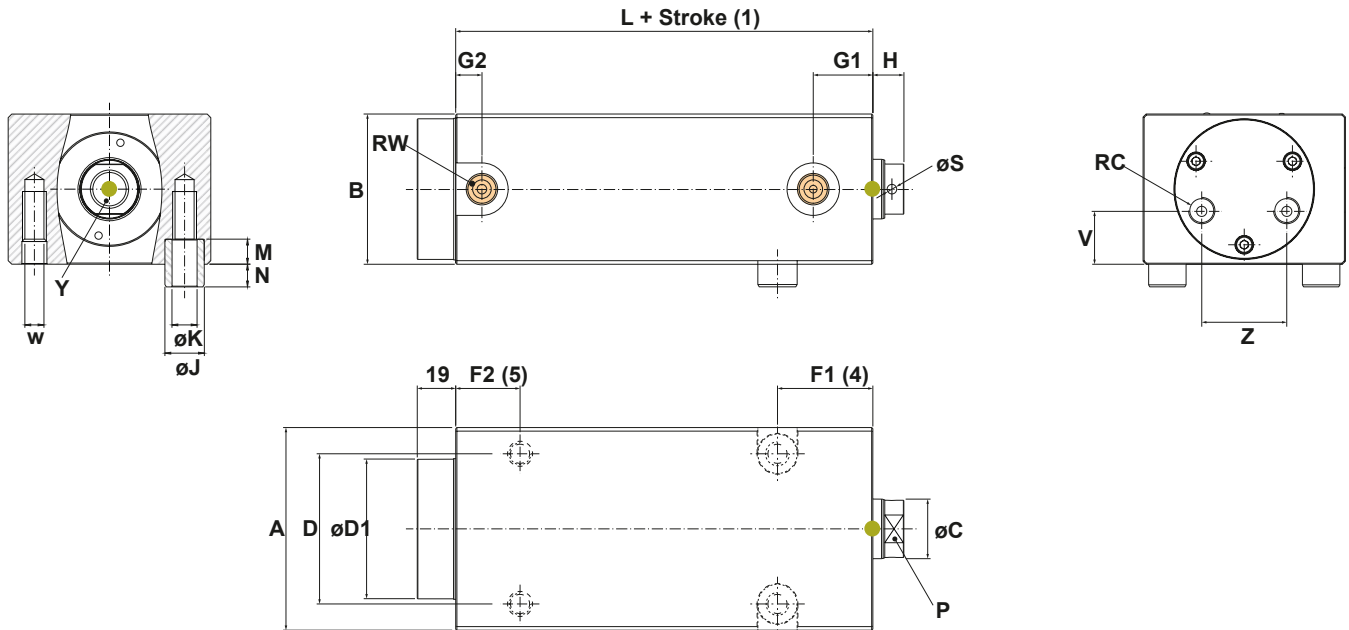

HOW TO ORDER

Reference: **B0FW025-090P2S1L**

TYPE	OPERATION MODE	FIXATION	PISTON Ø	STROKE ±0.5 (1)		PURGE (2)	SENSOR (2)	OIL CONNECTION (3)	A	B	C (3)	D	D1
				MIN.	MAX.								
B	0	FW	016	010	100	P0 Px	S0 Sx	L R	60	35	10	40	34
			025	010	120				65	45	16	50	44
			032	010	150				75	55	20	55	52
			040	020	160				85	63	25	63	61
			050	020	180				100	75	32	76	69
			063	020	180				125	95	40	95	89

STROKE (1) Can be ordered in multiples of 10mm, between Min. and Max. values.


PURGE / SENSOR(2) Replace x by FACE number.

OIL CONNECTION (3) Select Left (L) or Right (R).

Special Sizes Available On Request.

3D Insertion Reference

PURGE / SENSOR (2) POSITION ORDERING

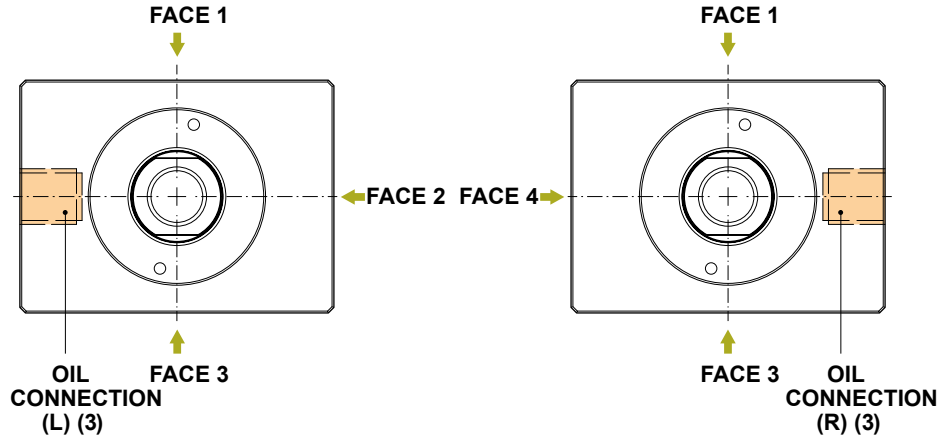

P0: Without Purge
Px: Purge in FACE x
Replace x by FACE number

SENSOR AND SENSOR ASSEMBLY KIT MUST BE ORDERED SEPARATELY

S0: Without Sensor
Sx: Sensor in FACE x
Replace x by FACE number

F1 (4)	F2 (5)	G1	G2	H ±0.5	J	K	L	M	N	P	RC	RW	S	V	W	Y	Z
30 (3)	27.5	18	15	8	10.5	6.5	43	6.5	5.5	8	1/8"	1/4"	-	12.4	M6x12	M6x12	17.5
33	30	20	13	10	13.5	8.5	48	8.5	7.5	13	1/8"	1/4"	3	12.5	M8x16	M10x15	22.5
38 (3)	28	23	11	12	16.5	10.5	51	10.5	9.5	17	1/8"	1/4"	4	17.3	M10x20	M12x15	26.3
40	28	25	11	13	16.5	10.5	55	10.5	9.5	21	1/4"	1/4"	4	23.5	M10x20	M16x25	31.2
44	30	27	13	14	18.5	13	65	13	11	26	1/4"	1/4"	5	26.5	M12x25	M20x30	42
50	41	28	16	18	25	17	72	17	15	32	1/4"	1/2"	5	31.5	M16X32	M24x35	50.5

(4) PISTON Ø16 & Stroke=10 F1 = 28
PISTON Ø32 & Stroke=10 F1 = 36

(5) PISTON Ø16 & Stroke ≤ 70 F2 = –
PISTON Ø25, Ø32, Ø40, Ø50, Ø63, Ø80, Ø100 & Stroke ≤ 90 F2 = –