


### ASSEMBLY KIT (CYLINDERS A+B+E)

Special Sizes Available On Request.

3D Insertion Reference



REFERENCE	A
SMM060	110
SMM100	170
SMM160	245

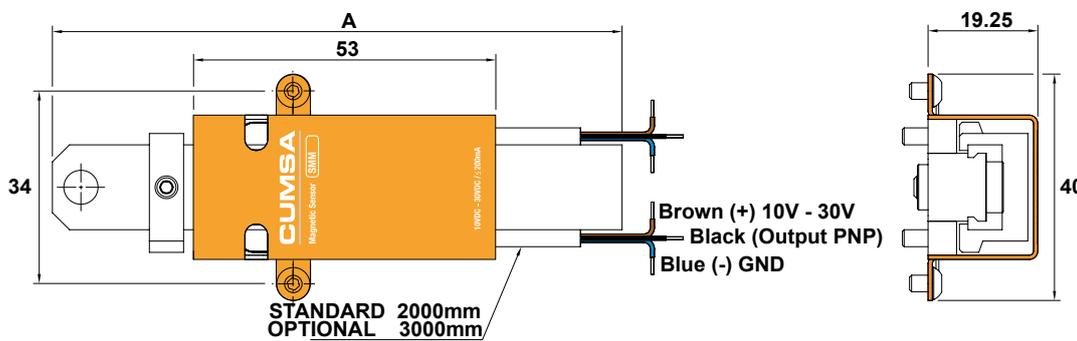

POWER CONSUMPTION	< 20 mA
POWER OUTPUT	DOUBLE NPN/PNP 500 mA
SWITCHING FREQUENCY	100 Hz
LED POWER/ OUTPUT TEST	RED/GREEN
AMBIENT OPERATING TEMPERATURE	-20°C to 75°C
CABLE MATERIAL	PVC
SHOCK/VIBRATION	N/A
DISTANCE DETECTION	4 mm
HISTERESYS ON/OFF	1 mm
ENCLOSURE RATING	IP65
REVERSE POLARITY PROTECTION	63

FOR MODEL	STROKE	ø 16	ø 32	ø 40
A - B	10	SMM060	SMM060	SMM060
A - B	20	SMM060	SMM060	SMM060
A - B	30	SMM060	SMM060	SMM060
A - B	40	SMM060	SMM060	SMM060
A - B	50	SMM060	SMM060	SMM060
A - B	60	SMM100	SMM100	SMM100
A - B	70	SMM100	SMM100	SMM100
A - B	80	SMM100	SMM100	SMM100
A - B	90	SMM100	SMM100	SMM100
A - B	100	SMM100	SMM100	SMM100
A - B	110		SMM100	SMM100
A - B	120		SMM160	SMM160
A - B	130			SMM160
A - B	140			SMM160
A - B	150			SMM160