







BLOCK CYLINDER
CILINDRO DE BLOQUE
BLOCKZYLINDER
CILINDRO A BLOCCO
CILINDRO DE BLOCO
VÉRIN BLOC



FALSE CUT

Max.
250 bar
(3600PSI)

Max.
180°C
(356°F)

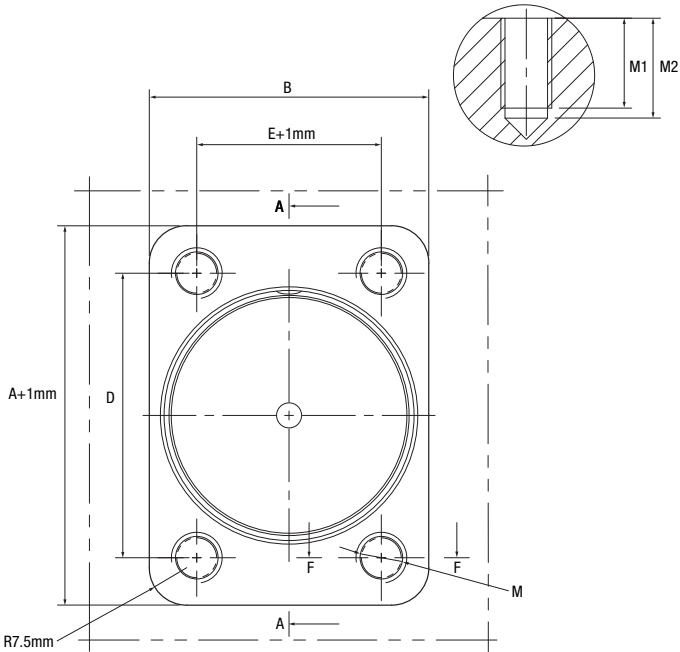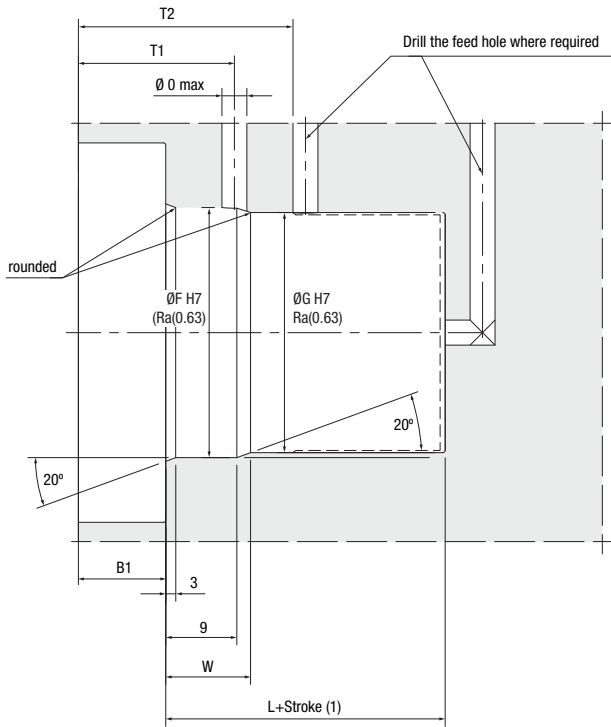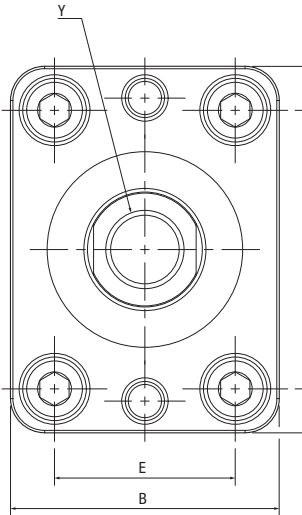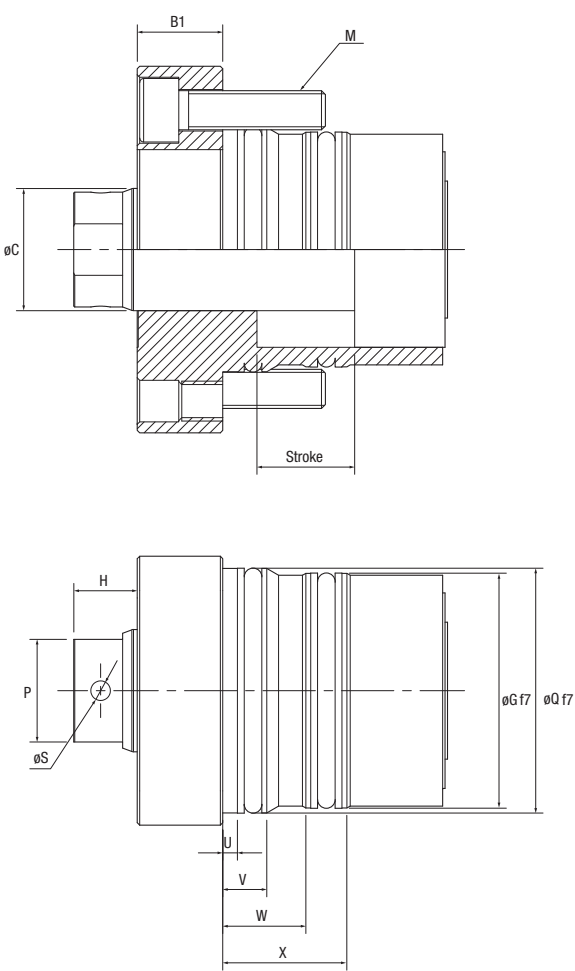

3D Insertion Reference

HOW TO ORDER / FORMATO DE PEDIDO / WIE MAN BESTELLT / COME ORDINARE/COMO ENCOMENDAR /COMMENT COMMANDER

F	O	AU	40	-	15	Reference: F0AU40-15																							
TYPE	OPERATION MODE 	FIXING STYLE	PISTON Ø	STROKE ±0.1 (1)		A	B	B1	C	D	E	G		H ±0.5	L	M	M1	M2	ø 0 Max	P	Q	S	T1	T2 Min	U	V	W	X	Y
				MIN.	MAX.																								
E	O	AU	025	010	050	55	40	13,5	16	42	27	34.1		10	23.5	M5x20	12	15	6	13	35.4	3	13.5	28	3	9	16	24.4	M10x15
			032	010	065	65	47	13,5	20	50	32	40.5		12	24.5	M6x20	13	16	7	17	42.1	4	13.5	29	3	9	17	25.4	M12x15
			040	010	080	75	55	17,5	25	57	37	48.1		13	26	M8x25	16	19	8	21	50.1	4	13.5	29	3	9	17	25.4	M16x25
			050	010	080	89	69	21,5	32	69	49	57.7		14	30.5	M10x30	19	21	10	26	59.7	5	15	32	3	9	19	27.4	M20x30
			063	010	080	106	86	25,5	40	84	64	73.6		18	34	M12x30	19	21	10	32	75.1	5	16	32	3	9	19	27.4	M24x35

STROKE (1)
Can be ordered in multiples of 10mm, between Min. and Max. values.
Se puede pedir en múltiplos de 10mm., entre los valores Min. y Max.
Kann in mehreren 10mm Varianten bestellt werden, zwischen min. und max.
Può essere ordinata in multipli di 10mm., tra i valori Min. e Max.
Disponível em múltiplos de 10mm, entre os valores Min. e Max.
Disponibile en multiple de 10mm, entre les valeurs mini et maxi.