

RV SERIES

RV 1000



Ordering-Example:

Special Sizes Available On Request.

ISO 11901 - 3	VDI 3003 - Blatt 3	B2 4005 (BMW)	W-DX35-6204 (Ford)
B8 3180 220 000 004(MB)	E24.54.815.G (PSA)	39D 997 (VW)	

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

SW

ACTIVE SAFETY

OSAS

USAS


OPAS

The new code will be supplied only when the old will be out of stock

easu
MANIFOLD

* F_{1i} = Isothermal end force at 100% Cu

** F_{1p} = Polytrophic end force at 100% Cu

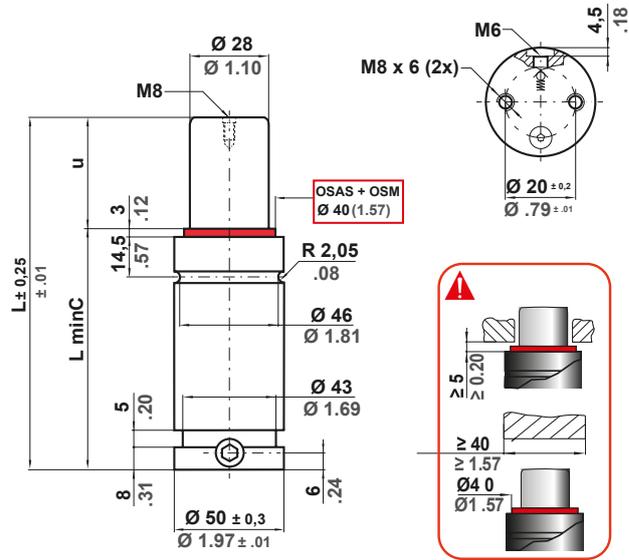

		0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 6,15 cm ² 0,953 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s 70,8 in/s	Maintenance kit 39BMRV01000C
--	--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	---	---------------------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		PED 2014/68/EU		
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	
RV 1000 - 010 - A	◆RV 1000 - 010 - B	10	0.39	58	2.28	48	1.89			1321	2969	1554	3494	23,7	1.45	0,49	1.08	✓
RV 1000 - 013 - A	◆RV 1000 - 013 - B	13	0.51	64	2.52	51	2.01			1370	3079	1631	3667	28,4	1.73	0,51	1.12	✓
RV 1000 - 016 - A	RV 1000 - 016 - B	16	0.63	70	2.76	54	2.13			1407	3163	1690	3800	33,1	2.02	0,54	1.19	✓
RV 1000 - 019 - A	RV 1000 - 019 - B	19	0.75	76	2.99	57	2.24			1436	3229	1737	3906	37,7	2.30	0,56	1.23	✓
RV 1000 - 025 - A	RV 1000 - 025 - B	25	0.98	88	3.46	63	2.48	920	2068	1479	3326	1807	4062	47,1	2.87	0,61	1.34	✓
RV 1000 - 032 - A	RV 1000 - 032 - B	32	1.26	102	4.02	70	2.76	± 5% 150 bar 2175psi + 20 °C + 68 °F		1514	3403	1863	4187	58,0	3.54	0,67	1.48	✓
RV 1000 - 038 - A	RV 1000 - 038 - B	38	1.50	114	4.49	76	2.99			1535	3451	1897	4266	67,4	4.11	0,72	1.59	✓
RV 1000 - 050 - A	RV 1000 - 050 - B	50	1.97	138	5.43	88	3.46			1564	3517	1946	4375	86,1	5.25	0,81	1.79	✓
RV 1000 - 063 - A	RV 1000 - 063 - B	63	2.48	164	6.46	101	3.98			1585	3564	1981	4453	106,3	6.49	0,92	2.03	✓
RV 1000 - 075 - A	RV 1000 - 075 - B	75	2.95	188	7.40	113	4.45			1599	3594	2003	4503	125,0	7.63	1,01	2.23	✓
RV 1000 - 080 - A	RV 1000 - 080 - B	80	3.15	198	7.80	118	4.65			1603	3605	2011	4520	132,8	8.10	1,05	2.31	✓
RV 1000 - 100 - A	RV 1000 - 100 - B	100	3.94	238	9.37	138	5.43			1618	3636	2034	4573	164,0	10.01	1,21	2.67	✓
RV 1000 - 125 - A	RV 1000 - 125 - B	125	4.92	288	11.34	163	6.42			1629	3663	2054	4617	202,9	12.38	1,41	3.11	✓

◆ Disposable

