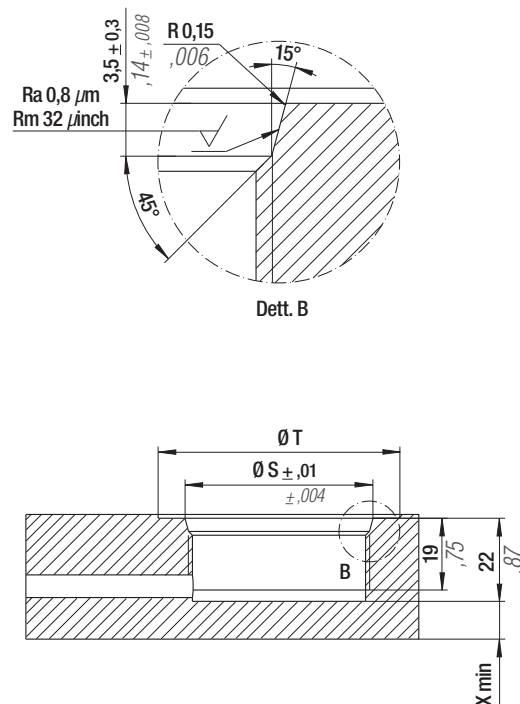
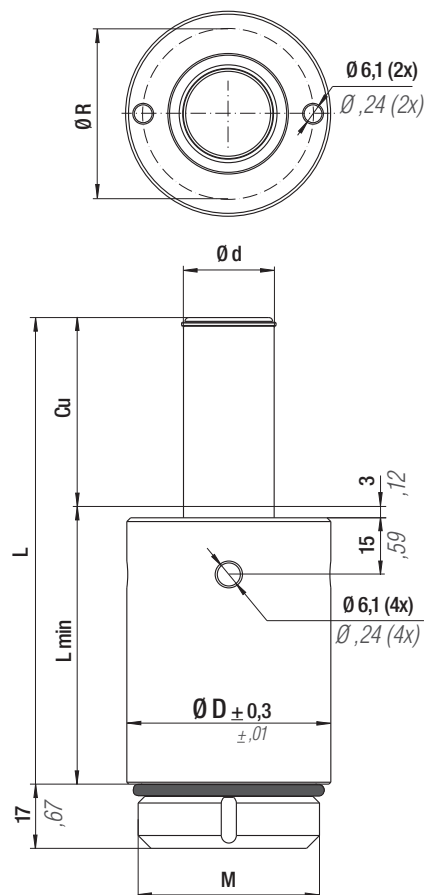


CC 1000

PED
2014/68/EU

Max Speed		°F 32 0,8 m/s 176		°C 0 80		 N₂		P max 110 bar 1595 psi		P min 20 bar 290 psi		S 9,62 cm ² 1,491 in ²				Maintenance kit 39BMCC01000A									
MODEL				Fo		M		Cu		L		L min		Ø D		Ø d		Ø R		Ø T		Ø S		Xmin	
				daN	lb			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
CC 1000 - 025 - A				1060	2383	M 48 X 2		25	0.98	73,5	2.89	48,5	1.91	54	2.13	24	0.95	44	1.73	64	2.52	49,9	1.97	10	0.39
CC 1000 - 038 - A				1060	2383	M 48 X 2		38	1.50	99,5	3.92	61,5	2.42	54	2.13	24	0.95	44	1.73	64	2.52	49,9	1.97	10	0.39
CC 1000 - 050 - A				1060	2383	M 48 X 2		50	1.97	123,5	4.86	73,5	2.89	54	2.13	24	0.95	44	1.73	64	2.52	49,9	1.97	10	0.39
CC 1000 - 075 - A				1060	2383	M 48 X 2		75	2.95	173,5	6.83	98,5	3.88	54	2.13	24	0.95	44	1.73	64	2.52	49,9	1.97	10	0.39
CC 1000 - 100 - A				1060	2383	M 48 X 2		100	3.94	223,5	8.80	123,5	4.86	54	2.13	24	0.95	44	1.73	64	2.52	49,9	1.97	10	0.39
CC 1000 - 150 - A				1060	2383	M 48 X 2		150	5.91	323,5	12.74	173,5	6.83	54	2.13	24	0.95	44	1.73	64	2.52	49,9	1.97	10	0.39