

M314-03

Spring Plungers

Ordering-Example:



Diferent Lengths On Request.

Hardened: HRC 36 ÷ 40

Material: 90Mn4



Material: 90Mn4
Hardened: HRC 36 ÷ 40
Body 34CrMo4
Black oxide finish.

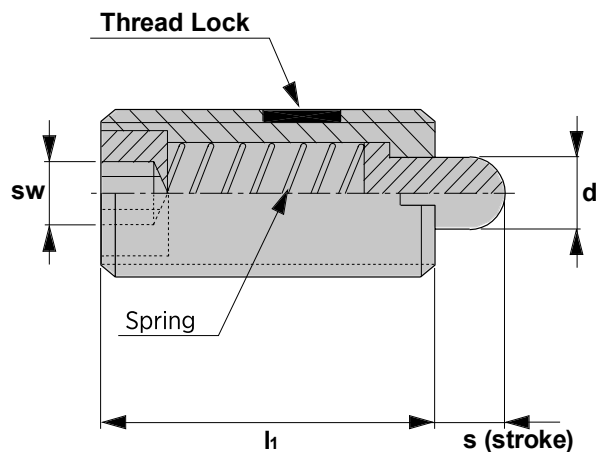

CODE	d	l1	s	sw	M	Initial Force N (Kgf)	Final Force N (Kgf)
M314-03-001	1	10	1,5	0,8	M3x0,5	0,4 (0,05)	2,9 (0,3)
M314-03-002	1,6	12	2	0,8	M4x0,7	1,9 (0,2)	9,8 (1,0)
M314-03-003	2	20	3	1,5	M5x0,8	3,9 (0,4)	19,6 (2,0)
M314-03-004	2	13	3	1,5	M5x0,8	1,9 (0,2)	7,8 (0,8)
M314-03-005	2	20	3	1,5	M5x0,8	1,9 (0,2)	9,8 (1,0)
M314-03-006	2,5	25	3	2,0	M6x1,0	2,9 (0,3)	9,8 (1,0)
M314-03-007	2,5	25	3	2,0	M6x1,0	7,8 (0,8)	29,4 (3,0)
M314-03-008	3,1	25	3	2,5	M8x1,25	2,9 (0,3)	9,8 (1,0)
M314-03-009	3,1	25	3	2,5	M8x1,25	7,8 (0,8)	29,4 (3,0)
M314-03-010	3,8	30	5	3,0	M10x1,5	2,9 (0,3)	14,7 (1,5)
M314-03-011	3,8	30	5	3,0	M10x1,5	9,8 (1,0)	49,0 (5,0)
M314-03-012	5,5	30	5	4,0	M12x1,75	1,9 (0,2)	9,8 (1,0)
M314-03-013	5,5	30	5	4,0	M12x1,75	9,8 (1,0)	49,0 (5,0)