


Ordering-Example:

Special Sizes Available On Request.

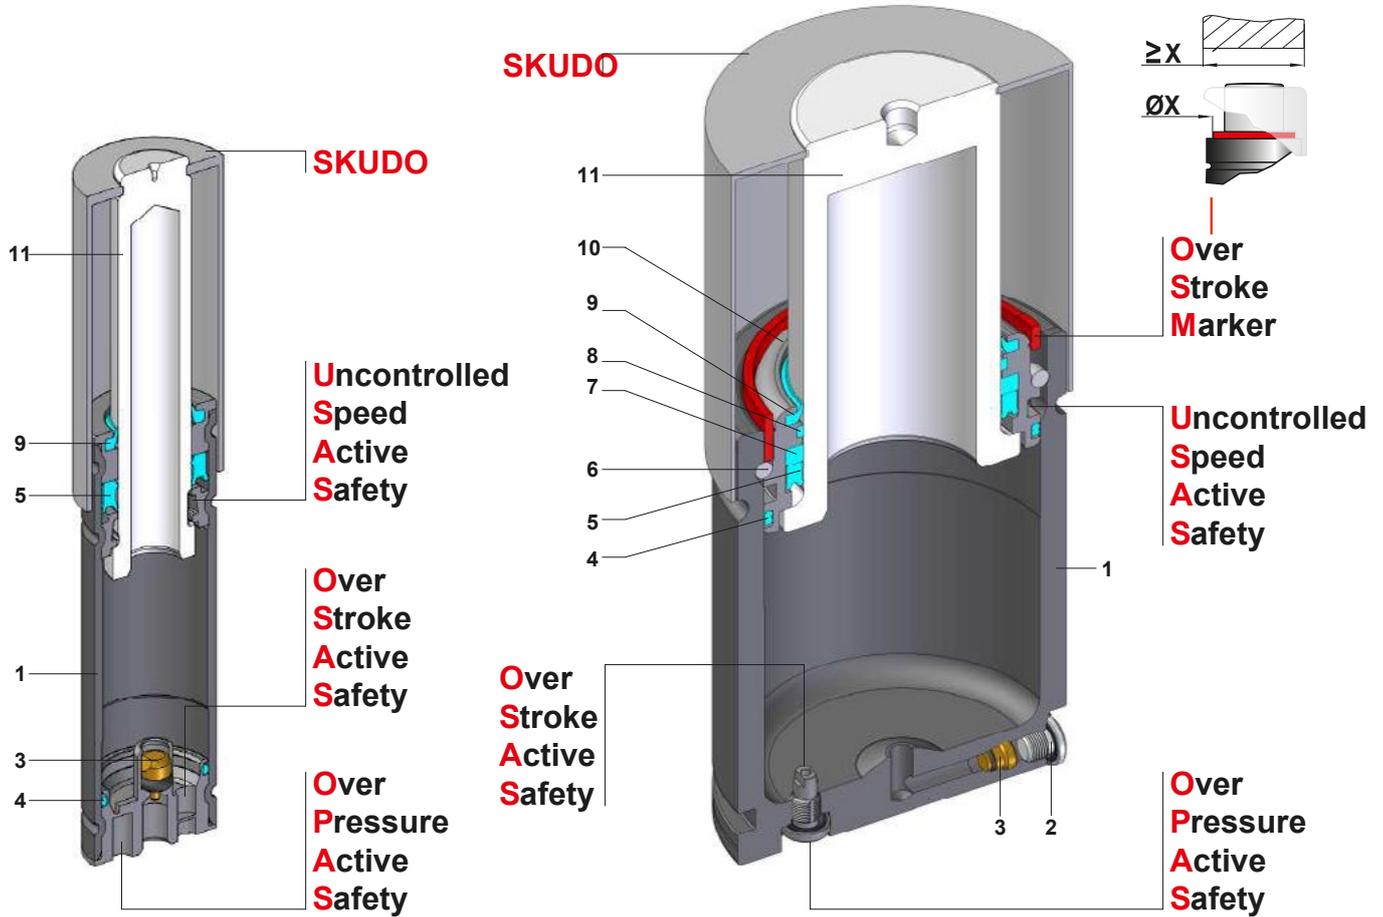

RS 170 - RS 320

RS 350 ÷ RS 9500

Minimum height, maximum force + SKUDO

SEALING	ROD SEAL
DESIGN	BUSH - BODY DESIGN

1	Body	5	Rod seal	9	Rod wiper
2	Plug	6	Retaining ring	10	Bush
3	Valve	7	Back-up ring	11	Rod (nitrited superfinished)
4	Dual ring seal	8	Guide ring		

RS SERIES

■ RV SERIES + SKUDO



Ordering-Example:
RS 1000-060-B-E-W

Special Sizes Available On Request.

RANGE CHART

Model	Body Ø		Stroke Cu		Initial force F0		OSAS	USAS	OPAS	SKUDO	SW
	mm	inch	mm	inch	daN	lb					
RS 170	19	0.75	7 - 122	0.28 - 4.80	170	382	✓	✓	✓	✓	✓
RS 320	25	0.98	7 - 122	0.28 - 4.80	320	719	✓	✓	✓	✓	✓
RS 350	32	1.26	7 - 122	0.28 - 4.80	360	809	✓	✓	✓	✓	✓
RS 500	38	1.50	7 - 122	0.28 - 4.80	470	1057	✓	✓	✓	✓	✓
RS 750	45	1.77	7 - 122	0.28 - 4.80	740	1664	✓	✓	✓	✓	✓
RS 1000	50	1.97	10 - 122	0.39 - 4.80	920	2068	✓	✓	✓	✓	✓
RS 1200	50	1.97	10 - 122	0.39 - 4.80	1047	2354	✓	✓	✓	✓	✓
RS 1500	63	2.48	10 - 122	0.39 - 4.80	1530	3440	✓	✓	✓	✓	✓
RS 2400	75	2.95	13 - 122	0.51 - 4.80	2385	5362	✓	✓	✓	✓	✓
RS 4200	95	3.74	13 - 122	0.51 - 4.80	4240	9532	✓	✓	✓	✓	✓
RS 6600	120	4.72	13 - 122	0.51 - 4.80	6630	14905	✓	✓	✓	✓	✓
RS 9500	150	5.91	16 - 122	0.63t - 4.80	9540	21447	✓	✓	✓	✓	✓

✓ Built-in as standard ✓ Optional upon request

HOW TO ORDER



Available versions

RS 1000-060-B Standard code	RS 1000-060-B-W Add "-W" to standard code	RS 1000-060-B-N Add "-N" to standard code	RS 1000-060-B-N-W Add "-N-W" to standard code	RS 1000-060-B-E Add "-E" to standard code	RS 1000-060-B-E-W Add "-E-W" to standard code
Self contained	Self contained + Secondary wiper	Linkable	Linkable ++ Secondary wiper	Easy Manifold	Easy Manifold Secondary wiper