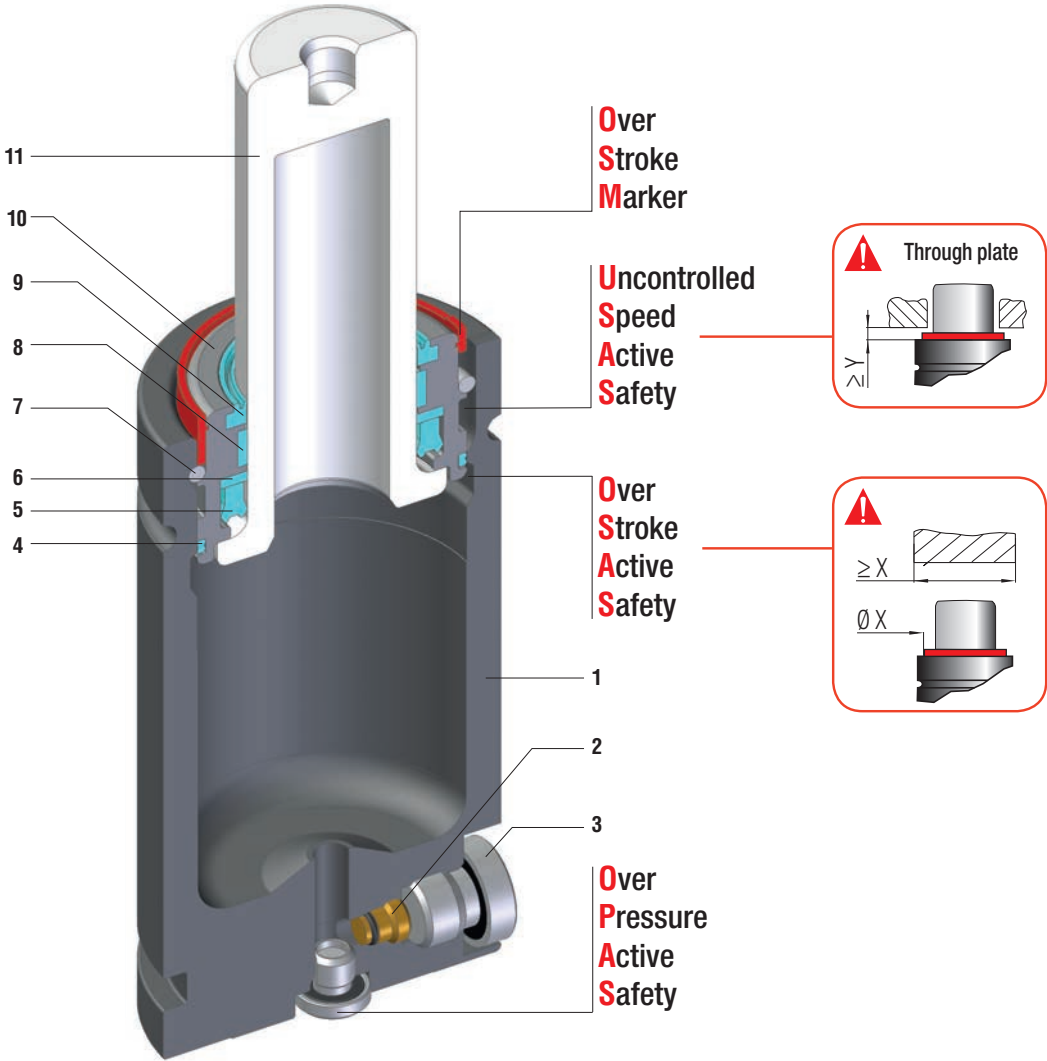


S SERIES

MB	Renault	Suzuki



Forze ISO, altezza ridotta - ISO forces, reduced height - ISO Kräfte, Reduzierte Höhe
Forces ISO, Hauteur réduite - ISO fuerzas, altura reducida - Forças ISO, altura reduzida

SEALING	ROD SEAL
DESIGN	BUSH - BODY DESIGN

1	Body	5	Rod seal	9	Rod wiper
2	Valve	6	Back-up ring	10	Bush
3	Plug	7	Retaining ring	11	Rod (nitrited superfinished)
4	Dual ring seal	8	Guide ring		



RANGE CHART

Model	Body Ø		Stroke Cu		Initial force F0						
	mm	inch	mm	inch	daN	lb	OSAS	USAS	OPAS	SKUDO	SW
S 500	45	1.77	6 - 125	0.24 - 4.92	470	1057	-	-	-	-	-
S 750	50	1.97	6 - 125	0.24 - 4.92	740	1664	✓	✓	✓	-	✓
S 1500	75	2.95	25 - 100	0.98 - 3.94	1530	3440	-	-	✓	-	-
S 3000	95	3.74	25 - 100	0.98 - 3.94	2945	6621	-	-	✓	-	-

✓ Built-in as standard

✓ Optional upon request




HOW TO ORDER

Series _____ Revision code _____

Model _____ **S750-050-B-N-W**

Stroke _____ Version _____


Available versions

**S 750-050-B**

Standard code




Self contained

**S 750-050-B-W**

Add "-W" to standard code




Self contained

+
Secondary wiper**S 750-050-B-N**

Add "-N" to standard code




Linkable

**S 750-050-B-N-W**

Add "-N-W" to standard code



Linkable

+
Secondary wiper**S 1500-050-A-E**

Add "-E" to standard code

Easy
ManifoldOnly for
S 1500 and S 3000