

M314-04


Spring Plungers

Ordering-Example:

Diferent Lengths On Request.

Material: Pin 90Mn4

Hardened: HRC 36 + 40

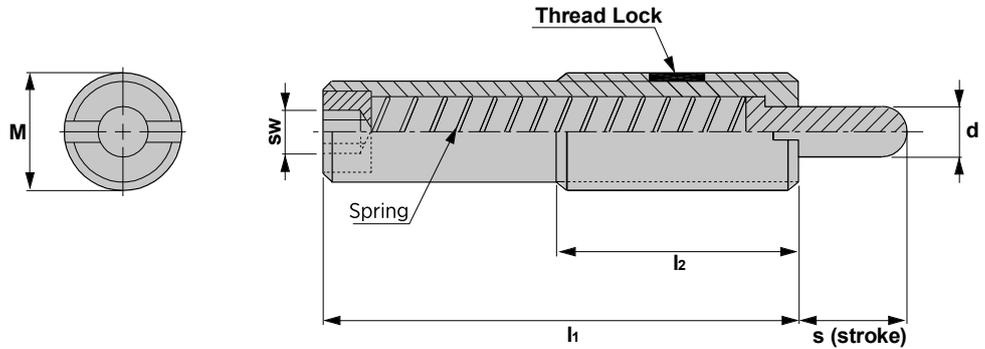

Material: Pin 90Mn4
 Hardened: HRC 36 + 40
 Body 34CrMo4
 Black oxide finish.

CODE	d	l1	l2	s	sw	M	Initial Force N (Kgf)	Final Force N (Kgf)
M314-04-001	5,5	43	35	10	4	M12x1,75	3,9 (0,4)	19,6 (2)
M314-04-002	5,5	43	35	10	4	M12x1,75	6,8 (0,7)	39,2 (4)
M314-04-003	8	50	35	10	5	M16x2,0	9,8 (1)	49,0 (5)
M314-04-004	8	50	35	10	5	M16x2,0	19,6 (2)	98,0 (10)
M314-04-005	8	60	35	10	5	M16x2,0	12,7 (1,3)	39,2 (4)
M314-04-006	8	60	35	10	5	M16x2,0	26,4 (2,7)	78,4 (8)
M314-04-007	8	60	35	15	5	M16x2,0	9,8 (1)	39,2 (4)
M314-04-008	8	60	35	15	5	M16x2,0	14,7 (1,5)	78,4 (8)
M314-04-009	8	85	35	20	5	M16x2,0	12,7 (1,3)	78,4 (8)
M314-04-010	8	85	35	20	5	M16x2,0	16,6 (1,7)	78,4 (8)
M314-04-011	8	125	35	30	5	M16x2,0	19,6 (1,8)	78,4 (4)
M314-04-012	8	125	35	30	5	M16x2,0	19,6 (2)	78,4 (8)
M314-04-013	8	155	35	50	8	M16x2,0	19,6 (2)	49,0 (5)
M314-04-014	8	155	35	50	8	M16x2,0	29,4 (3)	98,0 (10)
M314-04-015	10	60	45	15	8	M24x3,0	19,6 (2)	98,0 (10)
M314-04-016	10	60	45	15	8	M24x3,0	39,2 (4)	196,1 (20)
M314-04-017	15	70	45	20	12	M30x3,5	29,4 (3)	147,0 (15)
M314-04-018	15	70	45	20	12	M30x3,5	49,0 (5)	294,1 (30)