

C103-04

Lifting Pins

Ordering-Example:

Diferent Lengths On Request.


Material: C45E



WARNING!

For safety reasons, the weight of the tool has to be supported by just two lifting pins.

Respect the max. load.

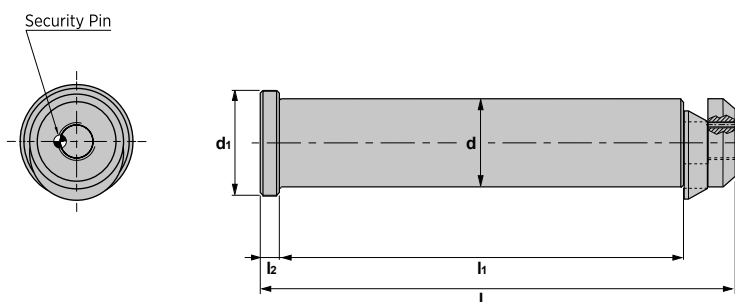

CODE	Max.Load (kg)	Max. Die Weight (kg)	d h11	d1	l +1	l1	l2
C103-04-030-158	3200	6400	30	40	158	129	10
C103-04-040-187	5000	10000	40	50	187	155	10
C103-04-050-220	8000	16000	50	60	220	180	11
C103-04-060-246	12500	25000	60	70	246	205	11
C103-04-080-305	18000	36000	80	90	305	205	12

C103-04

Replacement Lifting Pin for Lifting Bracket

Ordering-Example:

Diferent Lengths On Request.



Material: 42CrMo4+QT



WARNING!

For safety reasons, the weight of the tool has to be supported by just two lifting pins.

Respect the max. load.

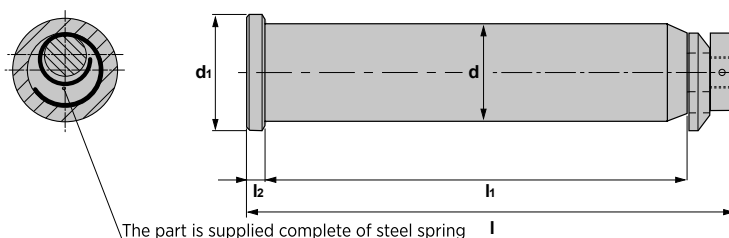

CODE	Max.Load (kg)	Max. Die Weight (kg)	d -0,3	d1	l	l1	l2	d2	h min.	b	s1
C103-04-050-190	5500	10050	50	63	230	190	10	52	130	70	50
C103-04-063-280	23000	45500	63	76	320	280	10	65	145	100	80
C103-04-080-320	30000	60000	80	89	370	320	15	82	145	100	100

C103-04

Lifting Pins

Ordering-Example:

Diferent Lengths On Request.


Material: 42CrMo4+QT




WARNING!

For safety reasons, the weight of the tool has to be supported by just two lifting pins.

Respect the max. load.

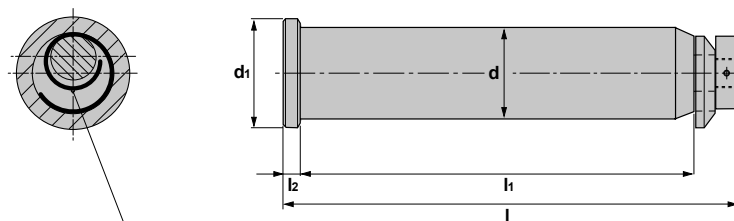

The part is supplied complete of steel spring



CODE	Max.Load (kg)	Max. Die Weight (kg)	d -0,3	d1	l	l1	l2	d2	h min.	b	s1
C103-04-050-019	10000	20000	50	63	230	190	10	52	70	85	50
C103-04-063-028	20000	40000	63	76	320	280	10	65	100	110	80
C103-04-080-032	40000	80000	80	89	370	320	15	82	105	110	100